



### AXLE ADAPTER (FOAM TIRES)

Position the cutout on the axle adapter to match your foam tire diameter, in mm. Here it is set for a 62mm diameter foam wheel and tire.

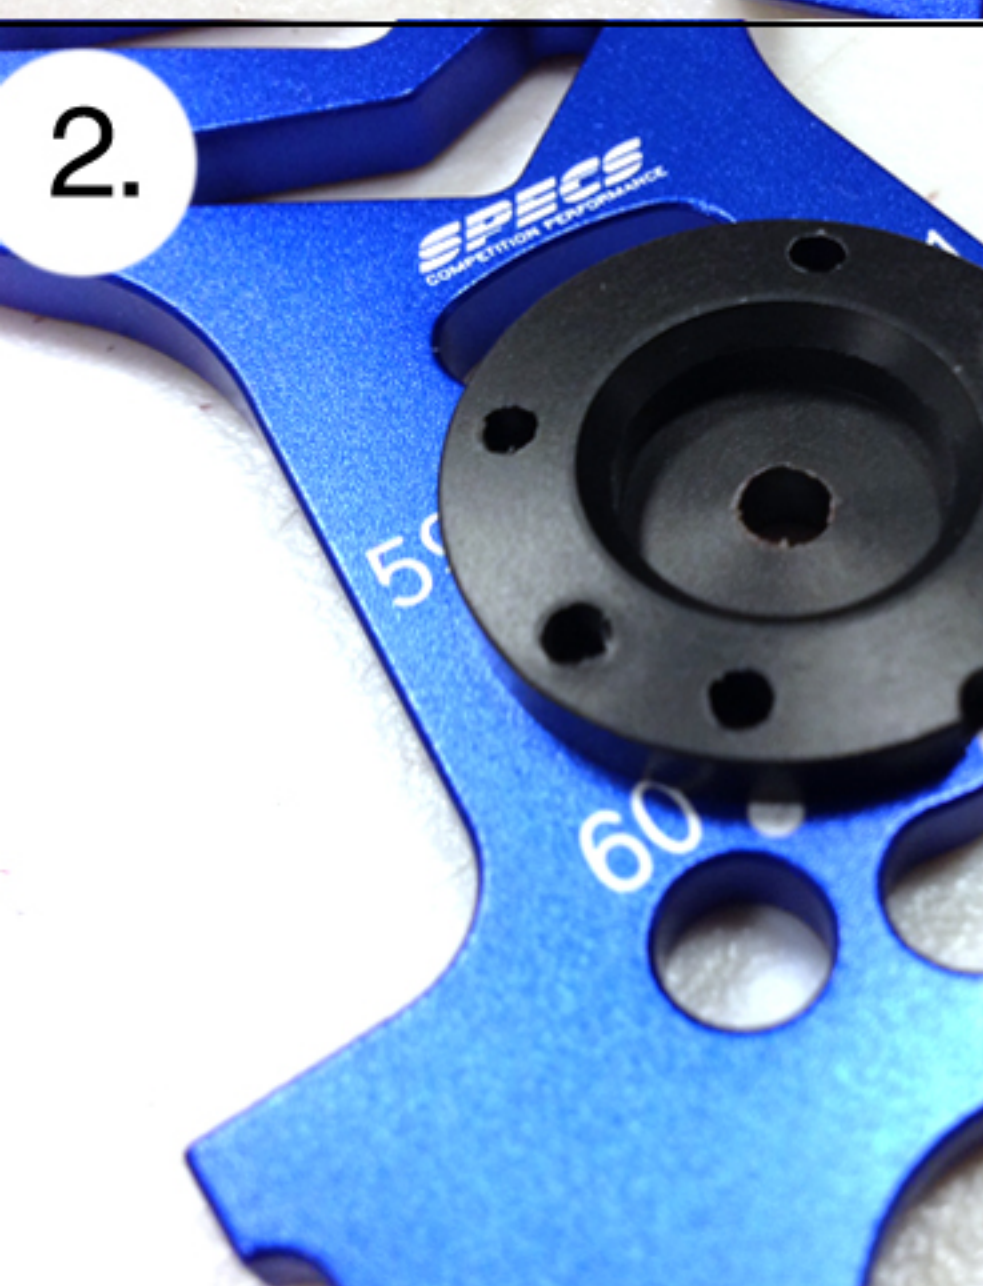


### AXLE ADAPTER (OTHER)

Position the cutout on the axle adapter at the bottom hole, for any other touring car tire types (rubber, drift).

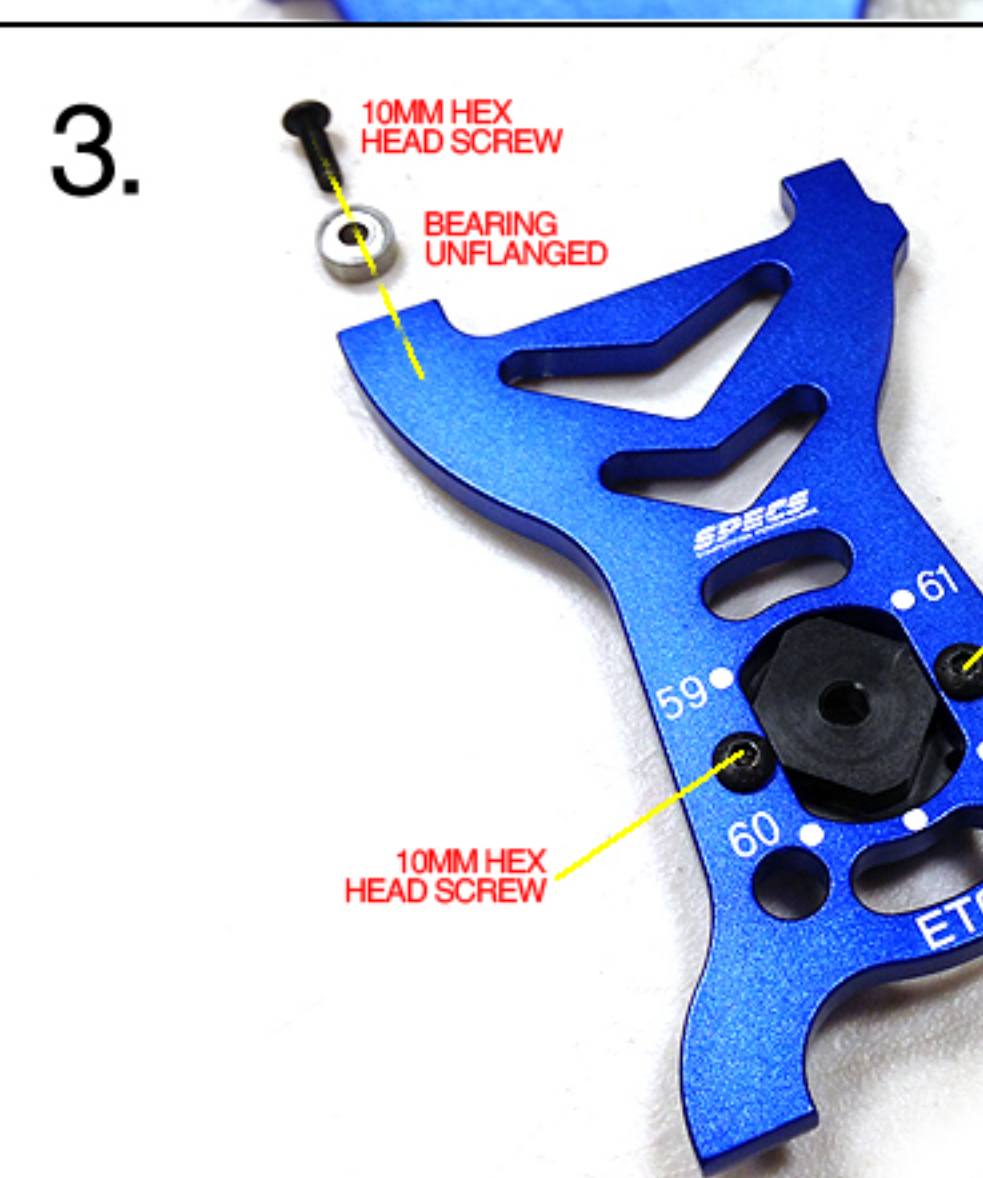



### SIDE PLATE ASSEMBLY

Use the fasteners and bearings shown here to assemble the side plates.

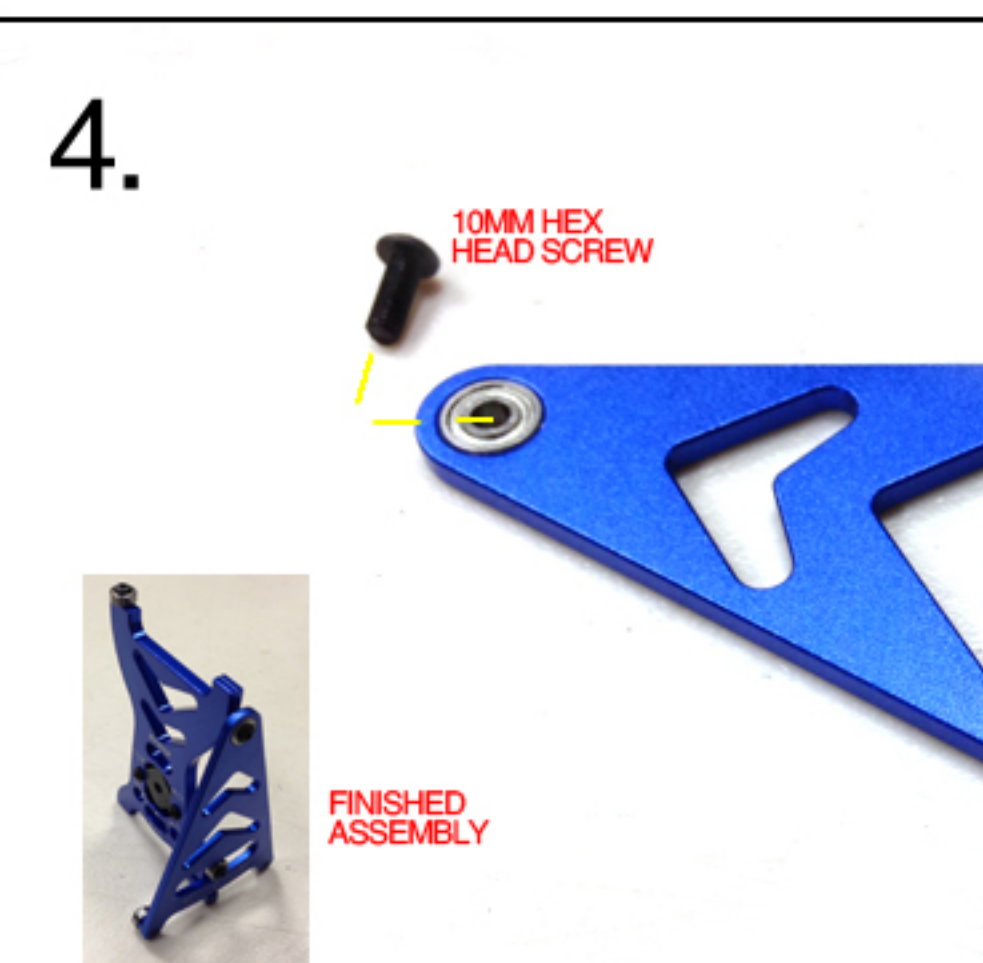


### ANGLE PLATE ASSEMBLY

Use the fasteners and bearings shown here to assemble the angle plates.

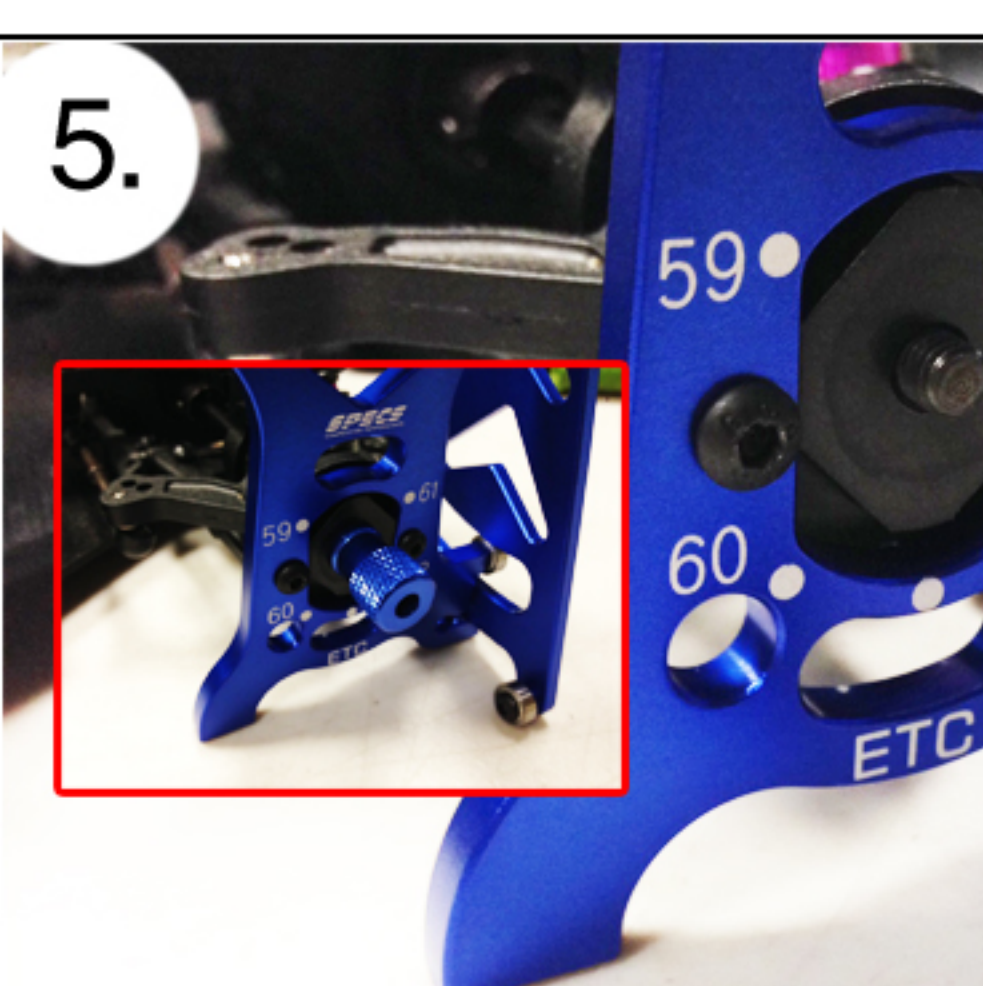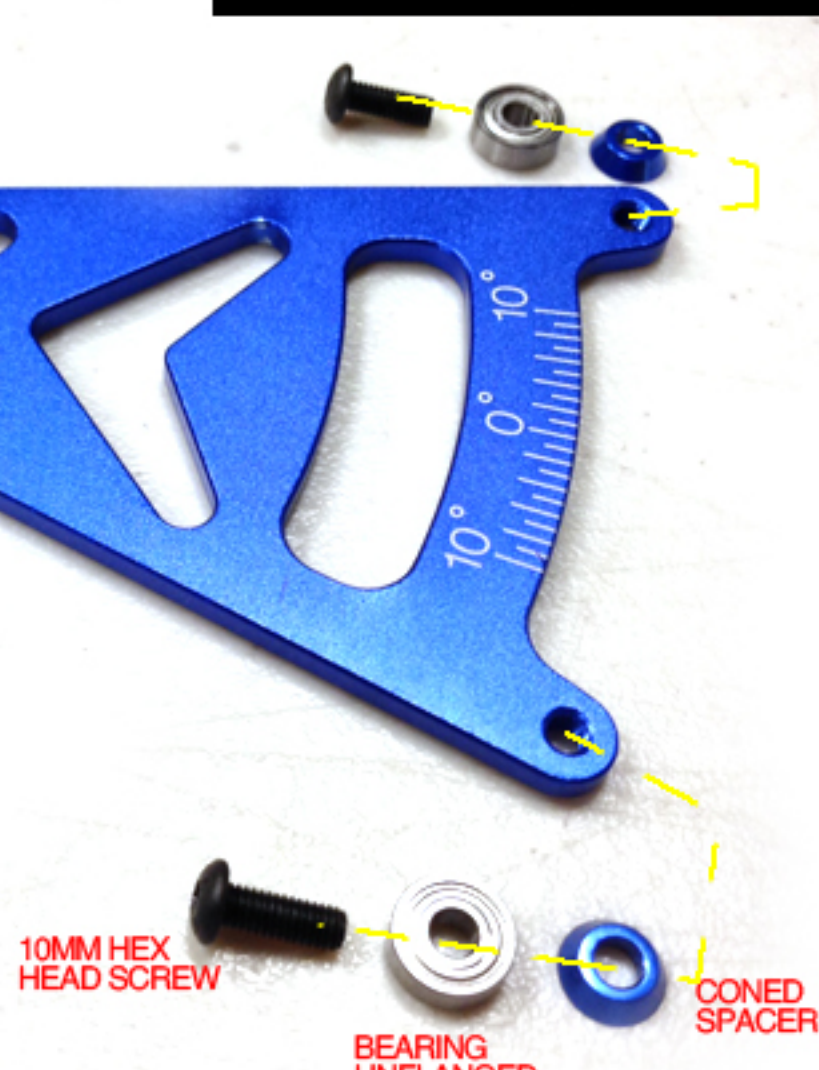

### VEHICLE MOUNTING

Use the long thumbscrews to attach setup station to your vehicle's drive axles.

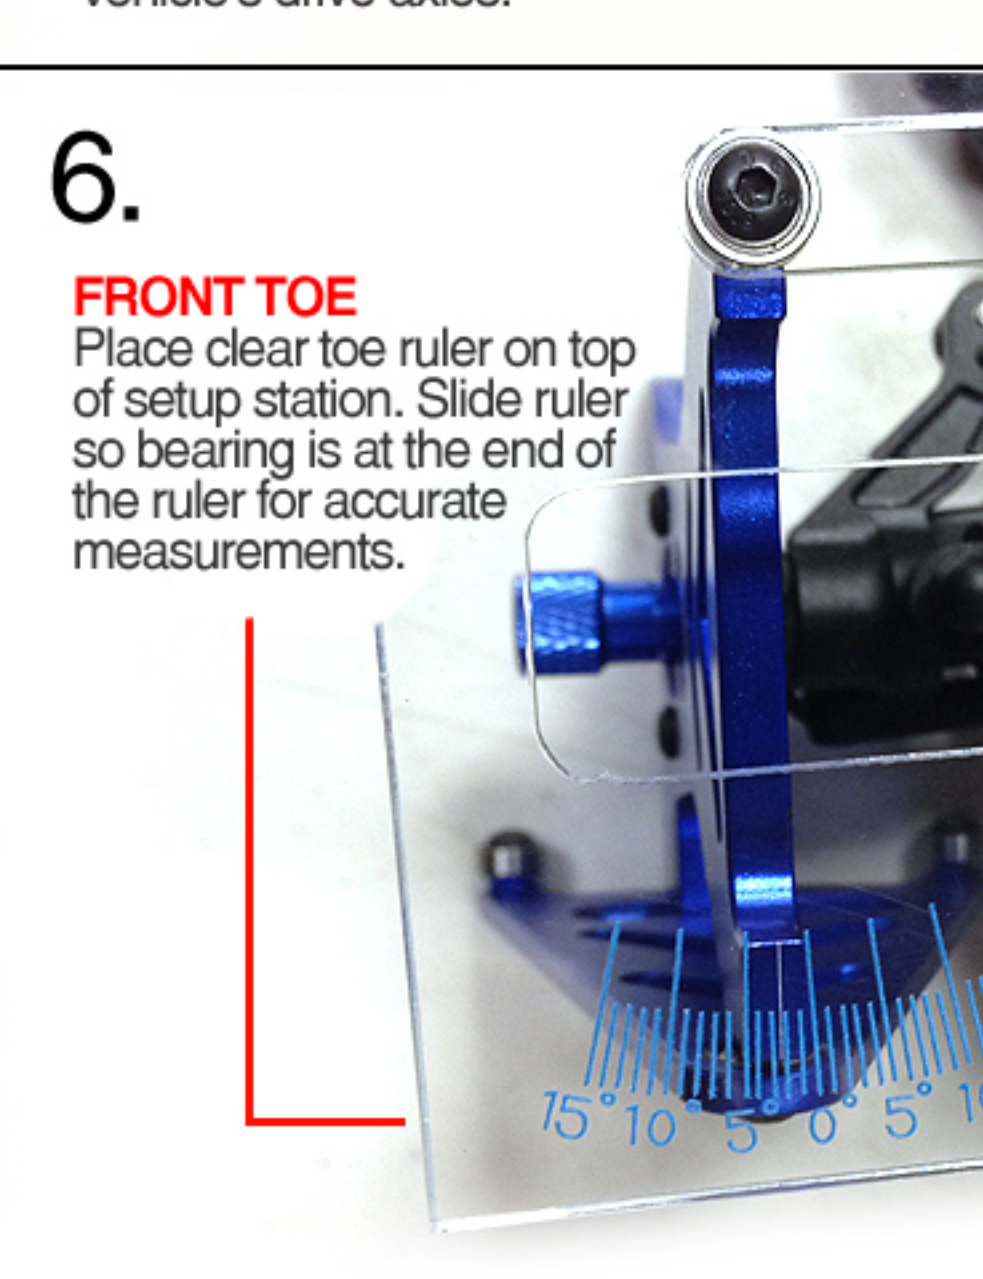

### FRONT TOE

Place clear toe ruler on top of setup station. Slide ruler so bearing is at the end of the ruler for accurate measurements.