
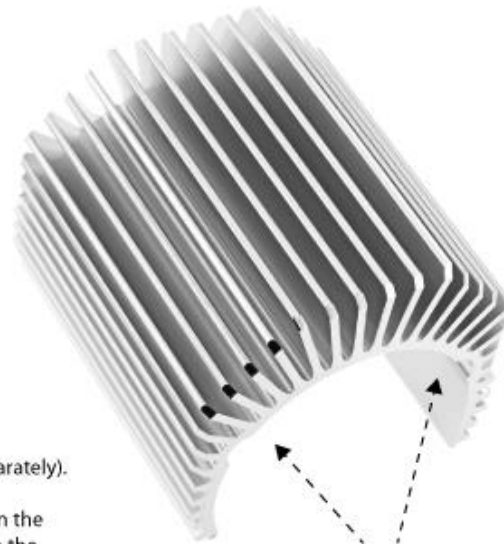


ASSEMBLY

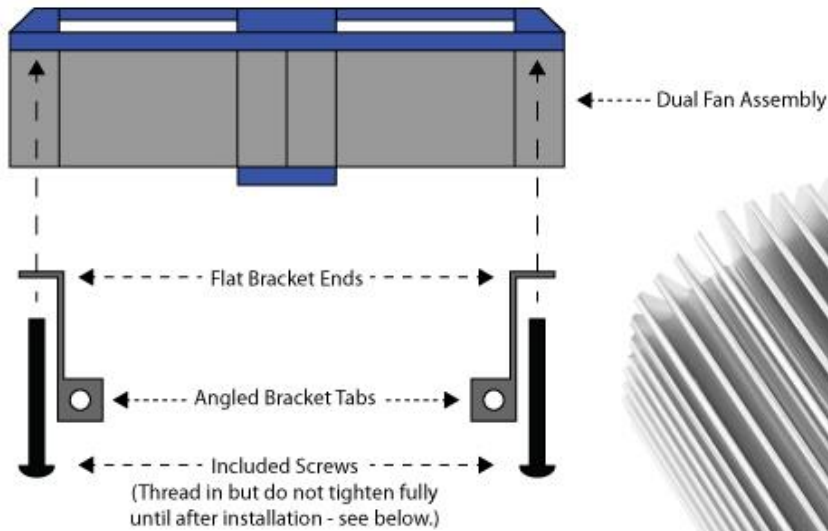

Line-up the angled bracket tabs to the matching heatsink fins (the cooling fan assembly should be positioned so that it is horizontal above the heatsink.)

INSTALLATION

1. Hold the assembly above the Traxxas 3362 Heatsink (sold separately).
2. Line up the angled bracket tabs so that they fit into the slots in the Traxxas 3362 heatsink fins. You will know which fins to use when the cooling fan assembly is positioned horizontally above the heatsink.
3. Tighten the cooling fan screws; this will clamp the brackets into the heatsink slots to hold the cooling fan securely in place.